
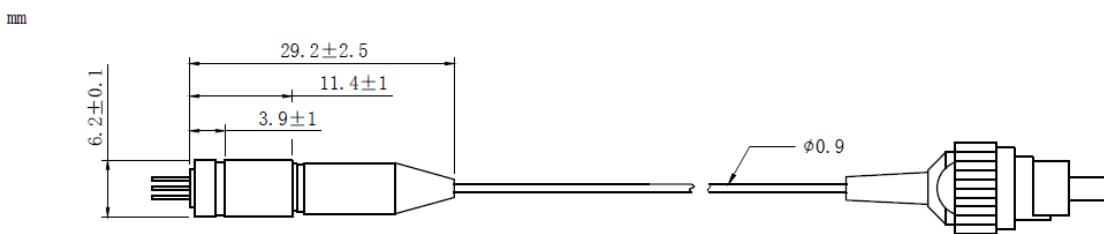

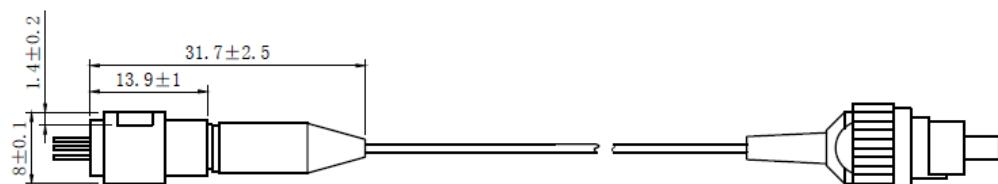
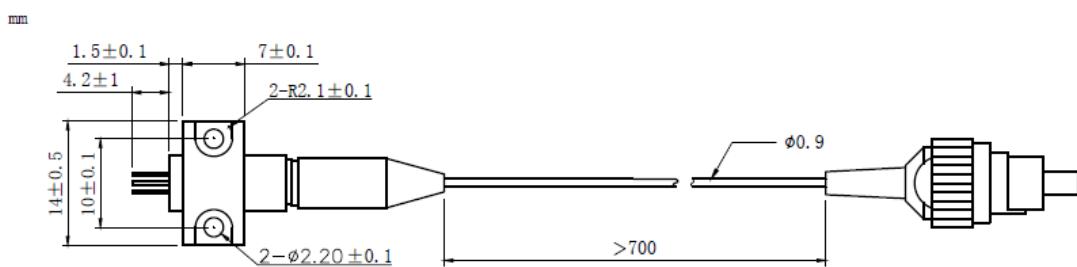


**510nm 10mW SM Coaxial Diode Laser with Polarization Maintaining Fiber
505nm~510nm PM Fiber Coupled Laser Diode with SMF | Green LD Module
RWLP-510-010m-PM**

510nm Pigtailed Diode Laser		10mW/PMF				
PARAMETER	SYMBOL	VALUE		UNIT		
Reverse Voltage	V _r	2.0		V		
Operating Temperature	T _{op}	-10 ~ +60		°C		
Storage Temperature	T _{stg}	-40 ~ +85		°C		
Lead soldering temperature (10 sec.)	T _{ls}	260		°C		
Features:	<ul style="list-style-type: none"> ● 510nm Green Diode Laser ● PM Fiber ● High Reliability ● High Polarization Extinction Ratio 					
Applications:	<ul style="list-style-type: none"> ● Biological Instruments ● Analytical Equipment ● Others 					
Specifications	RWLP-510-010m-PM					
	Min	Type	Max			
Center Wavelength@25°C	510nm±10nm					
Spectral Width (FWHM)	----	2.0nm	----			
Output Power	----	10mW	----			
Fiber Type	Polarization Maintaining Fiber					
Fiber Core	3um					
Polarization Extinction Ratio	13dB	15dB	----			
Recommend Operating Temperature	25°C					
Fiber Connector	FC/APC					
Fiber Length	>80cm					
Threshold Current	----	50mA	90mA			
Operating Current	----	180mA	200mA			
Operating Voltage	----	7.5V	8.0V			
Package Style	Coaxial or B82					
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.						

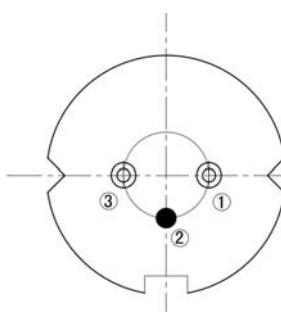

Coaxial Package View: (Part Number: RWLP-510-010m-PM)

B82 Package View: (Part Number: RWLP-510-010m-PM-B)

PIN Bottom View:


1	LD(+)
2	GND
3	LD(-)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

