


FL20022-3M-SS

Fiber Patchcord, 200um core, 0.22 NA, 3m long

Key Features:

- Silica/Silica Step Index Fiber
- Stainless steel Squarelock Sheathing
- High Power SMA Connectors

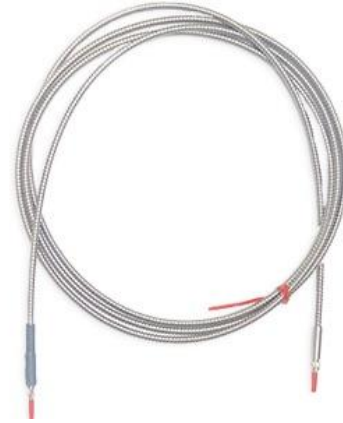

Specifications:

Item	Specification
Core Diameter	200um
NA	0.22
Cladding Diameter	220um
Jacket Diameter	3mm
Jacket	Stainless steel Squarelock Sheathing
Length	3m
Connectors	High Power SMA
Wavelength Range	400 to 2400 nm

