




Single-Mode CW Fiber Laser

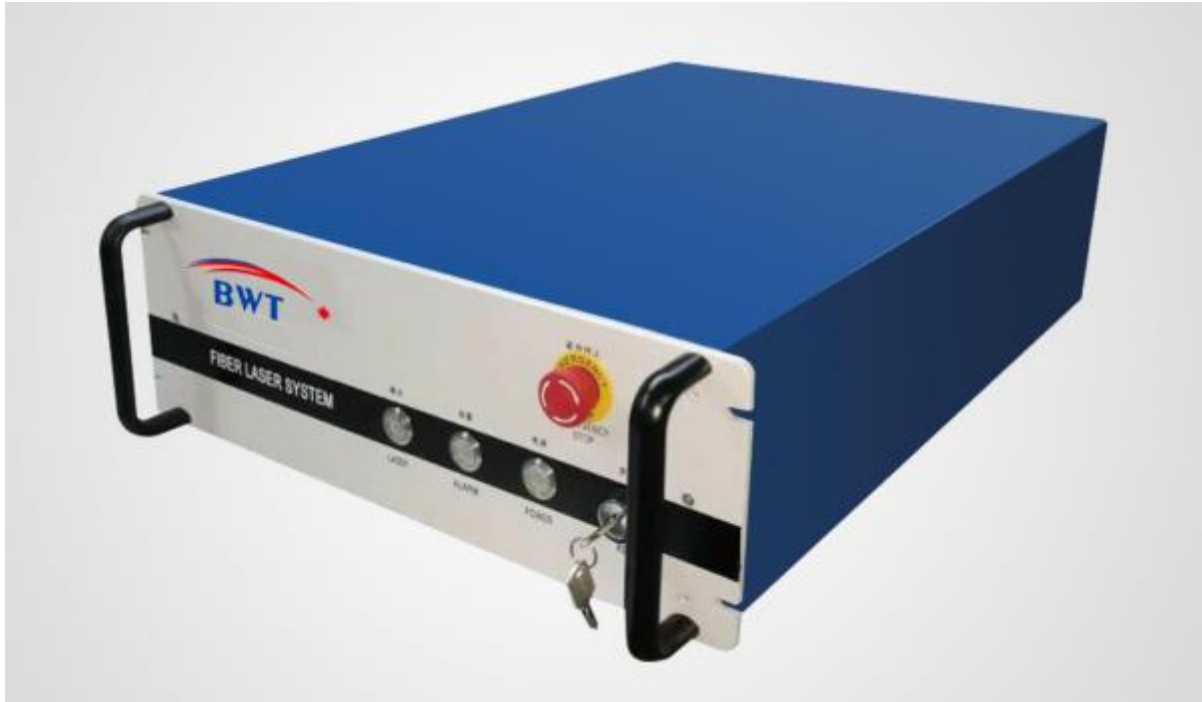

FEASURES

- Low costs and maintainance free
- Excellent power stability
- Higher current-laser transforming efficiency
- Optimized processing quality with two optional modes continuous and modulated pulse
- Good beam quality and suitable for precision machining
- Outstanding system reliability

APPLICATION

- Precision cutting
- Surface treatment
- 3D printing (SLS/SLM)
- Precision welding
- Drilling
- Metal plates processing

BWT laser 1000W single mode Yb-doped fiber lasers features high beam quality near diffraction limits for precision materials processing. With two optional modes, continuous mode and pulse mode, HAZ (heat affected zone) can be minimized. The system is designed for outstanding reliability and can be operated in harsh industrial application environment.

BWT laser 1000W fiber lasers are suitable for many applications, such as precision machining, 3D printing, metal plates processing, Li battery soldering, etc. Materials can be processed include steels, aluminum based and nickel based alloys, copper, titanium alloy, ceramics and many others.



Single-Mode CW Fiber Laser

Technical Specification

Optical Character	
Power	1000W
Wavelength	1080±10 nm
M ²	<1.5
Cable Length	15m or Customized
Beam Delivery	QBH or Customized
Guide Beam	Red
Operation Mode	Continuous or Modulated
Polarization	Random
Power Stability (25°C)	<3% (2h)
Power Adjustment Scope	10%-100%
Max Modulation Frequency	5kHz
Overall size and weights	
Weights	<70Kg
Outline Feature	4U (177 mm), 678mm
Electronic Character	
Voltage	Three Phase, 220±20V, AC, PE, 50/60Hz
Power Consumption	3.6 kW
Control Interface	RS232
Water Cooling Parameters	
Minimum Water Cooling Capacity	4.0 kW
Temperature Settings	25°C (Laser Module), 30°C (QBH)
Cooling Tubes Size(External)	φ16mm
Cooling Water Flux	>10 L/min
QBH Cooling Water Flux	1.5~2.0L/min