

# 1521nm DM LASER

EP1521-DM-B




**eblana**photonics




## SUPERIOR PERFORMANCE

Eblana Photonics EP1521-DM-B laser diode is a cost effective, highly coherent laser source, designed using Eblana's discrete-mode (DM) technology. Excellent SMSR and linewidth performance make it suitable for various applications including metrology and optical sensing of Acetylene.

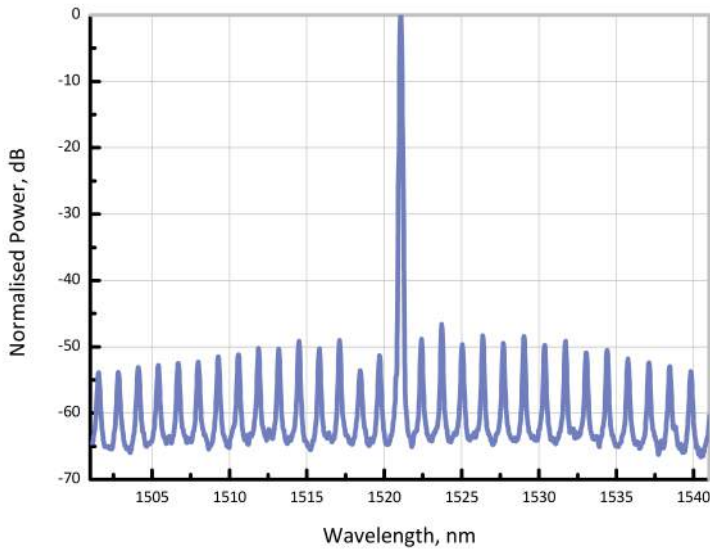

Optical Spectrum at 25°C

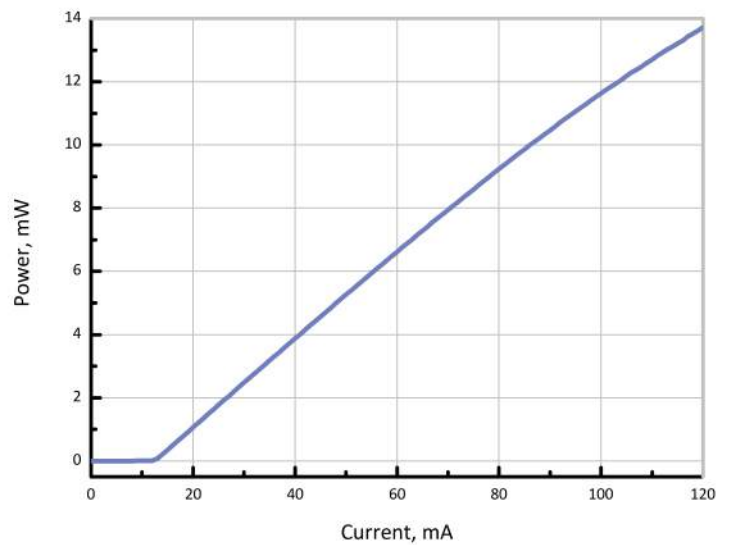

Output power (ex-fiber) as a function of bias current

## ELECTRO-OPTICAL CHARACTERISTICS\* ( $T_{SUB} = 25^{\circ} C$ )

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Centre Wavelength Range	$\lambda$	1490	1521	1530	nm
Wavelength specification	$\lambda_{spec}$	$\lambda - 1$	$\lambda$	$\lambda + 1$	nm
Side Mode Suppression Ratio	SMSR	30	40	-	dB
Threshold Current	$I_{th}$	-	15	18	mA
Output Power in fiber	$P_f$	7	9	-	mW
Optical linewidth	$\Delta f$	-	-	2	MHz
Temperature Tuning Coefficient	$T_{\lambda}$	0.07	0.1	0.14	nm/°C
Current Tuning Coefficient	$I_{\lambda}$	0.008	0.01	0.03	nm/mA
Slope Efficiency	SE	0.05	0.1	-	mW/mA
Thermistor Resistance	$R_T$	9.5	10	10.5	k $\Omega$
Thermistor Temp. Coefficient	C	-	-4.4	-	%/°C

\*CW bias unless otherwise stated



**eblana**photonics

[www.eblanaphotonics.com](http://www.eblanaphotonics.com)

[Sales@eblanaphotonics.com](mailto:Sales@eblanaphotonics.com)

Dublin, Ireland


# ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Forward Current	$I_f$	-	80	120	mA
Forward Voltage	$V_f$	-	1.3	1.6	V
TEC Current	$I_{TEC}$	-	-	1.2	A
Reverse Voltage LD	$V_r$	-	-	2.0	V
Reverse Voltage PD	$V_{rev}$	-	-	20	V
Case Temperature*	$T_{Case}$	-20	-	65	°C
Chip Submount Temperature	$T_{Sub}$	0	-	50	°C
Storage Temperature	$T_{storage}$	-40	-	85	°C


\*For  $T_{sub} < 25^{\circ}C$ , Max Case Temperature should be derated to  $T_{Case,Max} = T_{sub} + 40^{\circ}C$

## PACKAGING

The EP1521-DM-B product series is offered in a 14-pin Butterfly package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.

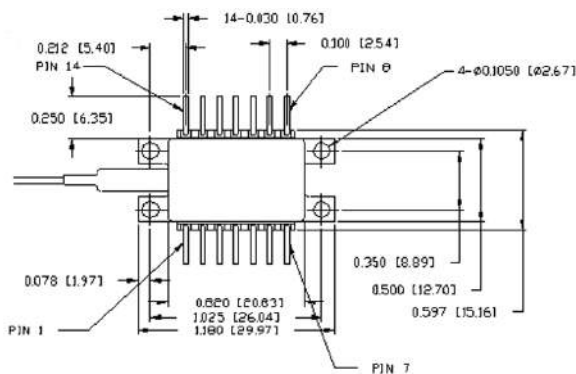


14-pin butterfly schematic

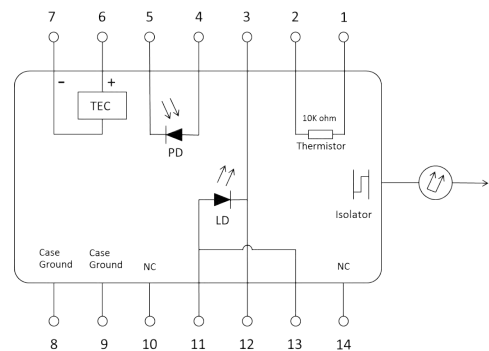

Standard "Pinout 01" option

## HOW TO ORDER

Construct your part number using the following example and email your order to [sales@eblanaphotonics.com](mailto:sales@eblanaphotonics.com), or call +353 1 675 3228.

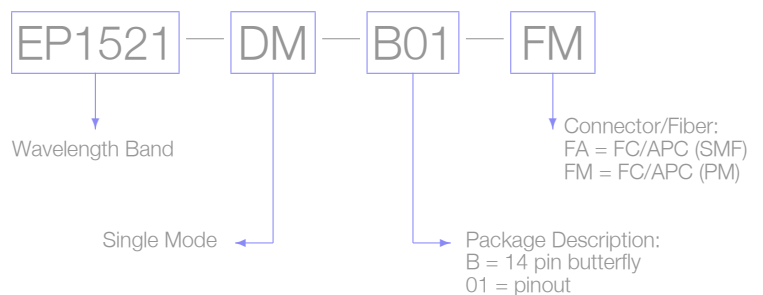

### Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.

©Eblana Photonics 2014. Eblana Photonics Reserves the right to amend this document at any time, without prior warning. ©Eblana Photonics Series 1521-DM-B Rev 2.0