


1742nm DM LASER

EP1742-DM-TP39




www.rpmclasers.com




ACCURATE HCL MONITORING

Eblana Photonics EP1742-DM-TP39 laser is a new product addition, in the range from 1735-1770nm, enabling sensitive detection of Hydrogen Chloride (HCL). Eblana's Discrete-Mode (DM) technology enables mode-hop free tunability and excellent SMSR, while ensuring cost effectiveness.

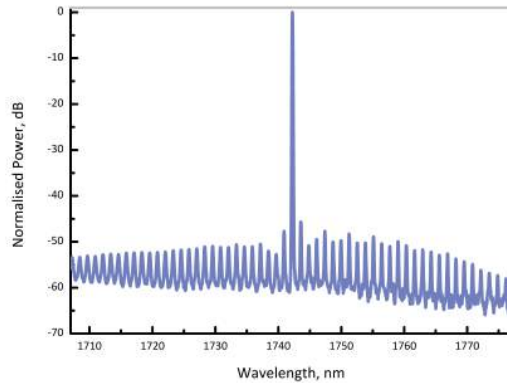

Optical Spectrum at 25°C

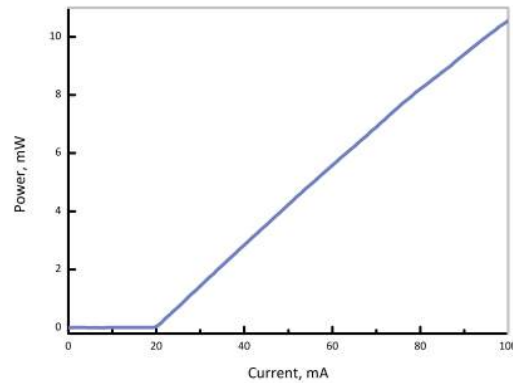

Output power as a function of bias current

ELECTRO-OPTICAL CHARACTERISTICS* ($T_{SUB} = 25^{\circ}C$)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Available Wavelength Range	λ	1735	1742	1770	nm
Wavelength tolerance	λ_{spec}	$\lambda - 1$	λ	$\lambda + 1$	nm
Side Mode Supression Ratio	SMSR	30	40	-	dB
Threshold Current	I_{th}	-	15	20	mA
Output Power*	P_f	4	6	-	mW
Optical linewidth	Δf	-	-	2	MHz
Temperature Tuning Coefficient	T_{λ}	0.07	0.1	-	nm/°C
Current Tuning Coefficient	I_{λ}	0.008	0.01	-	nm/mA
Slope Efficiency	SE	0.06	0.1	-	mW/mA
Thermistor Resistance	R_T	9.7	10	10.3	k Ω
Thermistor Temp. Coefficient	C	-	-4.4	-	%/°C
Beam divergence - perpendicular	$\theta_{\perp}$	-	30	-	degrees
Beam divergence - parallel	$\theta_{ }$	-	25	-	degrees


*At operating current = 80mA; operating voltage = 1.6V

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Forward Current	I_f	-	120	mA
Forward Voltage	V_f	-	2	V
TEC Current	I_{TEC}	-	0.7	A
Reverse Voltage LD	V_r	-	2.0	V
Case Temperature*	T_{Case}	-20	65	°C
Chip Submount Temperature	T_{Sub}	0	50	°C
Storage Temperature	$T_{storage}$	-40	85	°C

PACKAGING


The EP1742-DM-TP39 product series is offered in an industry-standard TO39 package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.



TO39 schematic

PIN NO	DESCRIPTION
1	TEC+
2	LD+
3	Thermistor
4	Thermistor
5	LD-
6	TEC-

Standard "Pinout 01" option

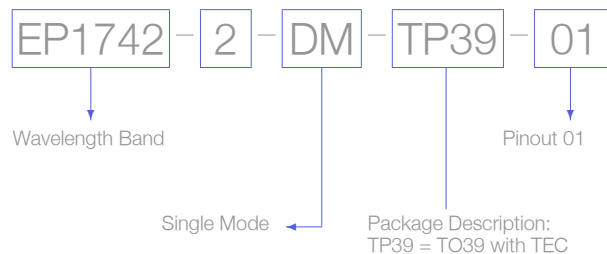

Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.