

# 2004nm DM LASER


EP2004-DM-TP39

**RPMC**  
www.rpmclasers.com




## SUPERIOR CO<sub>2</sub> SENSING

Eblana Photonics EP2004-DM-TP39 laser diode, available in a range from 1950-2150nm, has been developed for precision sensing of Carbon Dioxide. Eblana's Discrete-Mode (DM) technology enables excellent SMSR performance and mode-hop free tuning at a highly competitive price

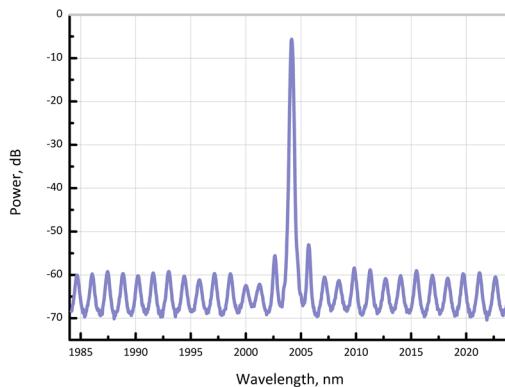

Optical Spectrum at 25°C

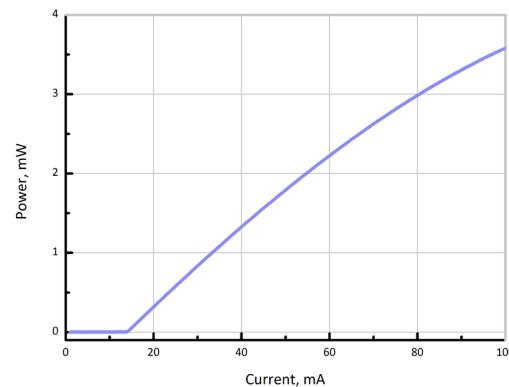

Output power as a function of bias current

## ELECTRO-OPTICAL CHARACTERISTICS\* (T<sub>SUB</sub> = 25° C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Available Wavelength Range	$\lambda$	1950	2004	2150	nm
Wavelength tolerance	$\lambda_{\text{spec}}$	$\lambda - 1$	$\lambda$	$\lambda + 1$	nm
Side Mode Supression Ratio	SMSR	30	40	-	dB
Threshold Current	$I_{\text{th}}$	-	20	35	mA
Facet output power	$P_f$	3	5	-	mW
Optical linewidth	$\Delta f$	-	-	2	MHz
Temperature Tuning Coefficient	$T_\lambda$	0.07	0.1	0.14	nm/°C
Current Tuning Coefficient	$I_\lambda$	-	7	-	pm/mA
Slope Efficiency	SE	0.035	0.055	-	mW/mA
Thermistor Resistance	$R_T$	9.7	10	10.3	kΩ
Thermistor Temp. Coefficient	C	-	-4.4	-	%/°C
Beam divergence - perpendicular	$\theta \perp$	-	46	-	degrees
Beam divergence - parallel	$\theta \parallel$	-	33	-	degrees


\*CW bias unless otherwise stated

## ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNIT
Forward Current	$I_f$	-	120	mA
Forward Voltage	$V_f$	-	2	V
TEC Current	$I_{TEC}$	-	0.7	A
Reverse Voltage LD	$V_r$	-	2.0	V
Case Temperature*	$T_{Case}$	-20	65	°C
Chip Submount Temperature	$T_{Sub}$	0	50	°C
Storage Temperature	$T_{storage}$	-40	85	°C

## PACKAGING

The EP2004-DM-TP39 product series is offered in an industry standard TO39 package - Inquire for other packaging options. The standard package pinout is shown below, variations may be requested.

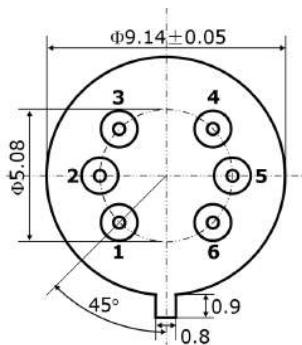


TO39 schematic - outside bottom view

PIN NO	DESCRIPTION
1	TEC+
2	LD+
3	Thermistor
4	Thermistor
5	LD-
6	TEC-

Standard "Pinout 01" option



[www.rpmclasers.com](http://www.rpmclasers.com)

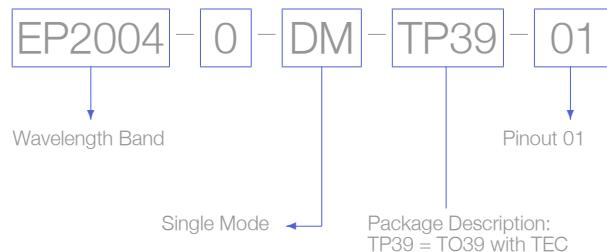

### Laser Safety

This is a Class 3R Laser Product as defined by International Standard IEC 60825-1, Edition 2. Invisible Laser radiation is emitted from the end of the fiber or connector. Avoid direct eye exposure to the beam. Laser safety labels are not attached to the module due to space limitations but instead are affixed to the outside of the shipping carton.