

JENOPTIK

## High-power diode laser bars:

1060 nm, 80 W cw

JDL-BAB-20-19-1060-TE-80-2.0

### Features

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

### Applications

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Printing industry
- Defense and security

# High-power diode laser bars | 1060 nm, 80 W cw

## JDL-BAB-20-19-1060-TE-80-2.0

### Specifications

JDL-BAB-20-19-1060-TE-80-2.0

Operation*	Symbol	Min	Nom	Max	Unit
Wavelength (cw)	$\lambda$	1057	1060	1063	nm
Optical Output Power	$P_{opt}$		80		W
Operation Mode			cw, switched		
Power Modulation			100		%
<b>Geometrical</b>					
Number of Emitters			19		
Emitter Width	W	95	100	105	$\mu\text{m}$
Emitter Pitch	P		500		$\mu\text{m}$
Filling Factor	F		20		%
Bar Width	B	9600	9800	10000	$\mu\text{m}$
Cavity Length	L	1980	2000	2020	$\mu\text{m}$
Thickness	D	115	120	125	$\mu\text{m}$
<b>Electro Optical Data*</b>					
Fast Axis Divergence (FWHM)	$\theta_{\perp}$		27	30	$^{\circ}$
Fast Axis Divergence**	$\theta_{\perp}$		55	58	$^{\circ}$
Slow Axis Divergence at 60 W (FWHM)	$\theta_{\parallel}$		5	7	$^{\circ}$
Slow Axis Divergence at 60 W**	$\theta_{\parallel}$		7	9	$^{\circ}$
Pulse Wavelength	$\lambda$	1047	1050	1053	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		5	6	nm
Slope Efficiency***	$\eta$	0.92	0.97		W/A
Threshold Current	$I_{th}$		5	7	A
Operating Current	$I_{op}$		88	93	A
Operating Voltage	$V_{op}$		1.5	1.6	V
Series Resistance	$R_s$		4	5	m $\Omega$
Degree of TE Polarization	$\alpha$	95			%
EO Conversion Efficiency***	$\eta_{tot}$	55	60		%

\* Mounted on a heat sink with  $R_{th} = 0.5$  K/W, coolant temperature 25 °C, operating at nominal power


\*\* Full width at 95 % power content

\*\*\* Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing


Note: Nominal data represents typical values.

Safety Advice: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

### Power - Current - Voltage - Characteristics\*

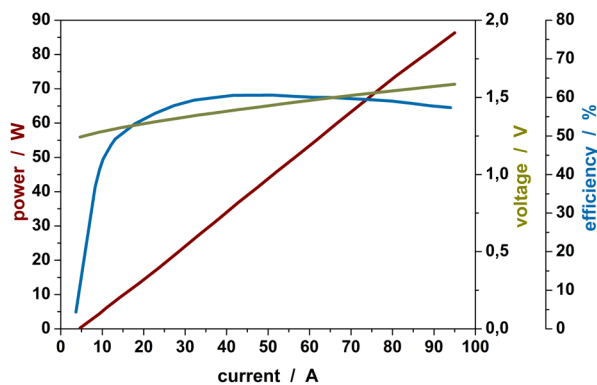

### Spectral Characteristics\*

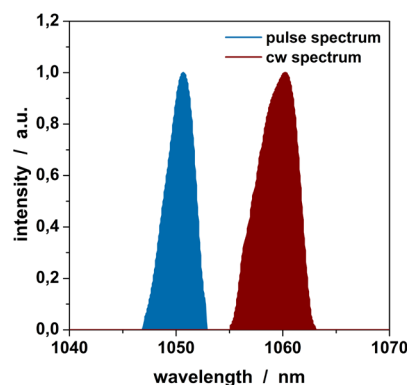

JENOPTIK Diode Lab GmbH | Max-Planck-Strasse 2  
12489 Berlin | Germany

#### Sales contact:

JENOPTIK Laser GmbH  
Phone +49 3641 65-3053 | Fax +49 3641 65-4011  
laser.sales@jenoptik.com | www.jenoptik.com

