

JENOPTIK

High-power diode laser bars:

1020 nm, 200 W cw

JDL-BAB-50-23-1020-TE-200-4.0

Features

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

Applications

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Printing industry
- Defense and security

High-power diode laser bars | 1020 nm, 200 W cw

JDL-BAB-50-23-1020-TE-200-4.0

Specifications

JDL-BAB-50-23-1020-TE-200-4.0

Operation*	Symbol	Min	Nom	Max	Unit
Wavelength (cw)	λ	1017	1020	1023	nm
Optical Output Power	P_{opt}		200		W
Operation Mode			cw, switched		
Power Modulation			100		%
Geometrical					
Number of Emitters			23		
Emitter Width	W	195	200	205	μm
Emitter Pitch	P		400		μm
Filling Factor	F		50		%
Bar Width	B	9600	9800	10000	μm
Cavity Length	L	3980	4000	4020	μm
Thickness	D	115	120	125	μm
Electro Optical Data*					
Fast Axis Divergence (FWHM)	θ_{\perp}		25	27	$^{\circ}$
Fast Axis Divergence**	θ_{\perp}		55	57	$^{\circ}$
Slow Axis Divergence at 200 W (FWHM)	θ_{\parallel}		6	8	$^{\circ}$
Slow Axis Divergence at 200 W**	θ_{\parallel}		7	9	$^{\circ}$
Pulse Wavelength	λ	1003	1006	1009	nm
Spectral Bandwidth (FWHM)	$\Delta\lambda$		4	5	nm
Slope Efficiency***	η	0.95	1.0		W/A
Threshold Current	I_{th}		21	24	A
Operating Current	I_{op}		221	235	A
Operating Voltage	V_{op}		1.42	1.47	V
Series Resistance	R_s		0.6	0.7	m Ω
Degree of TE Polarization	α	95			%
EO Conversion Efficiency***	η_{tot}	58	63		%

* Mounted on a heat sink with $R_{th} = 0.3$ K/W, coolant temperature 25 °C, operating at nominal power


** Full width at 95 % power content

*** Item may change upon notice and acceptance by JENOPTIK Diode Lab GmbH, due to future improvements of technology or processing


Note: Nominal data represents typical values.

Safety Advice: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

Power - Current - Voltage - Characteristics*

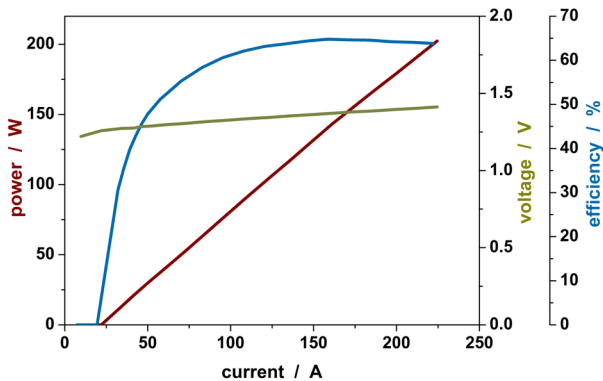

Spectral Characteristics*

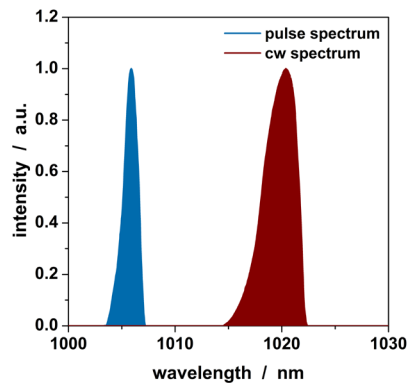

JENOPTIK Diode Lab GmbH | Max-Planck-Strasse 2
12489 Berlin | Germany

Sales contact:

JENOPTIK Laser GmbH
Phone +49 3641 65-3053 | Fax +49 3641 65-4011
laser.sales@jenoptik.com | www.jenoptik.com

