

Multi-Wavelength Detachable Diode Laser

KA250D150F006G050MH



Features:

- ◆ Multiple wavelength
- ◆ Multiple function
- ◆ 200 μ m fiber detachable

Applications:

- ◆ Medical Use

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

Multi-Wavelength Detachable Diode Laser

KA250D150F006G050MH

	Specifications(25 °C)	Symbol	Unit	KA250D150F006G050MH		
				Minimum	Typical	Maximum
808 ⁽¹⁾	CW Output Power	P_o	W	25	-	-
	Center Wavelength	λ_c	nm	808±10		
	Operating Current	I_{op}	A	-	-	9
	Threshold Current	I_{th}	A	-	0.8	-
	Operating Voltage	V_{op}	V	-	-	8
980 ⁽¹⁾	CW Output Power	P_o	W	15	-	-
	Center Wavelength	λ_c	nm	980±10		
	Operating Current	I_{op}	A	-	-	13.5
	Threshold Current	I_{th}	A	-	1	-
	Operating Voltage	V_{op}	V	-	-	4
635 ⁽¹⁾	CW Output Power	P_o	W	0.6	-	-
	Center Wavelength	λ_c	nm	635±10		
	Operating Current	I_{op}	A	-	-	0.8
	Threshold Current	I_{th}	A	-	0.2	-
	Operating Voltage	V_{op}	V	-	-	5.2
450 ⁽¹⁾	CW Output Power	P_o	W	5	-	-
	Center Wavelength	λ_c	nm	450±10		
	Operating Current	I_{op}	A	-	-	3
	Threshold Current	I_{th}	A	-	-	0.35
	Operating Voltage	V_{op}	V	-	10	-
Fiber Data	Core Diameter	D_{core}	μm	-	200	-
	Numerical Aperture	NA	-	-	0.22	-
	Fiber Connector	-	-	-	SMA905	-
Thermistor	-	R_t	(K Ω)/β(25°C)	-	10±3%/3477	-
PD	-	PD	μA	10	-	-
Other	ESD	V_{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T_{st}	°C	-20	-	70
	Operating Temperature ⁽³⁾	T_{op}	°C	15	-	35
	Relative Humidity	RH	%	15	-	75


(1) Data measured under operation temperature at 25°C

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case, Acceptable operating range is 15°C~35°C, but performance may vary.

Multi-Wavelength Detachable Diode Laser
KA250D150F006G050MH

Package Dimensions (mm)

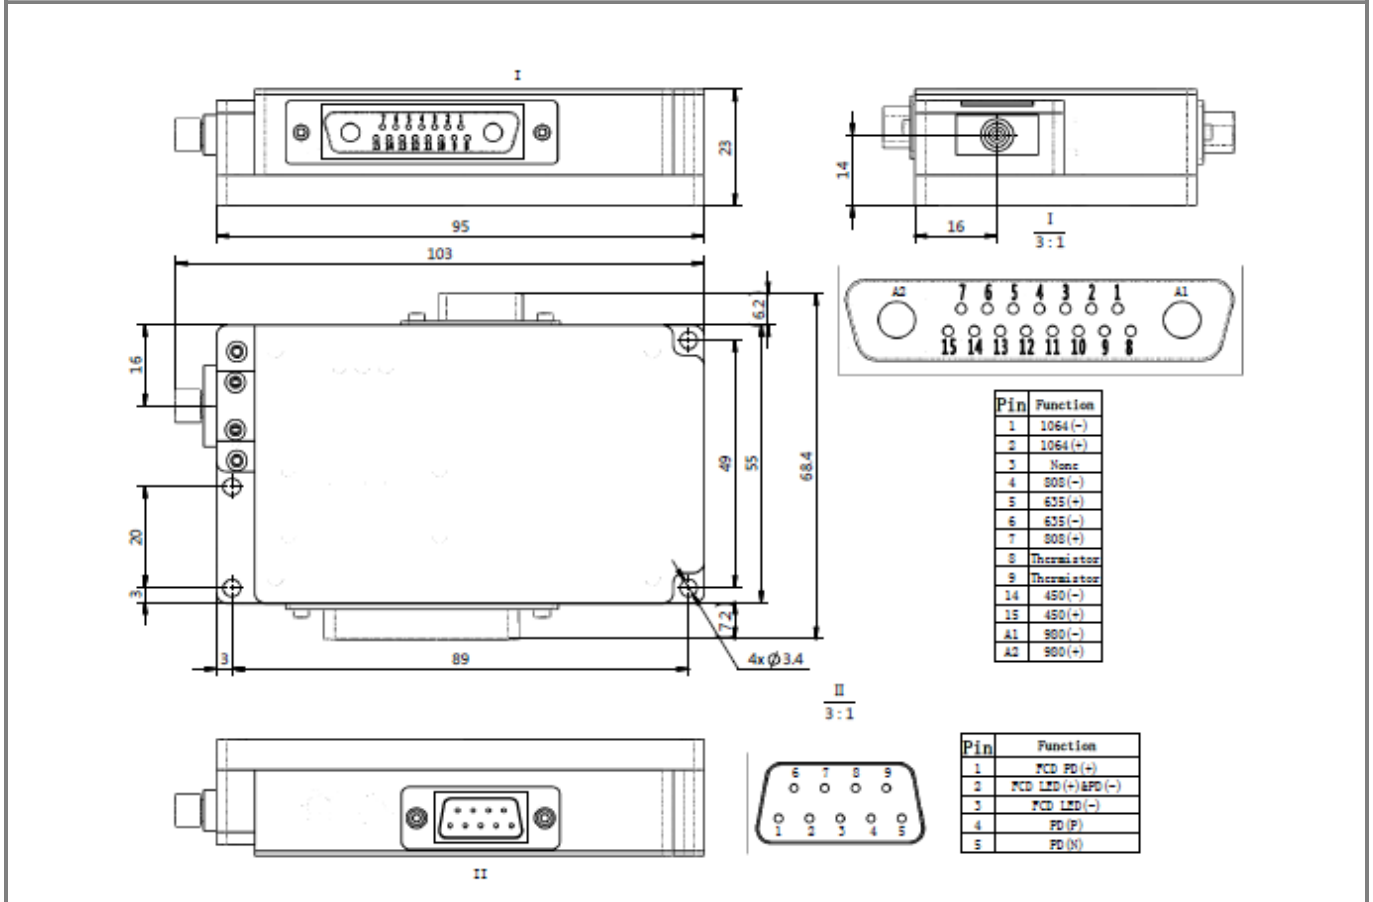

OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during storage, transportation and operation.
- ◆ Make sure the fiber output end and input end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature ranges from 15°C to 35°C .
- ◆ Storage temperature ranges from -20°C to +70°C .



Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.19-1