


Onda 266nm

Spec. #: ND18603

High Peak Power Diode Pumped Solid State Laser

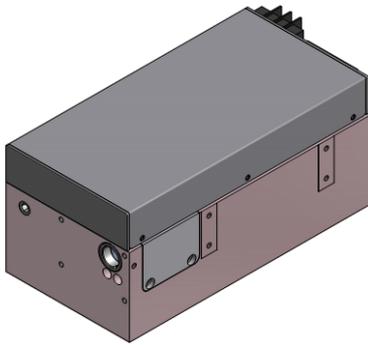

FEATURES

- _ Up to 80 uJ
- _ Short pulse duration
- _ Q-Switching : up to 50 kHz
- _ All solid state design
- _ Air Cooled
- _ Low heat waste

Technical Specifications	Typical	
Output Wavelength	266	nm
Pulse energy	Up to 80	uJ
Pulse Width	2 to 6	ns
Repetition Rate	Single shot to 50	kHz
Polarization	Linear 100:1	
Beam diameter (1/e ²)	< 2	mm
Beam Quality (M ²)	< 1.5 @ 10 kHz	
Electrical Requirements	24 V DC IN (*)	
Cooling	Air Cooled	
Preliminary Mechanical Dimensions	360 x 105 x 95	mm ³
Weight	< 6	kg

(*) Optional: 100-230 AC DC Power Supply

Options Available:	Applications:
- Low jitter option - Water cooling	- Micromachining - Material Processing



All information included in this document is subject to change without notice.

Update data sheets can be provided after formal request.

For complete details, please contact your local **Bright Solutions** sales representative or visit our website at www.brightsolutions.it

Bright Solutions Srl
Via Artigiani, 27
27010 Cura Carpignano - PV
Italy
Ph. +39 0382583094
e-mail: sales@brightsolutions.it