


Vento 50W 532nm MOPA sub-ns laser

Preliminary

Spec. #: VN20306

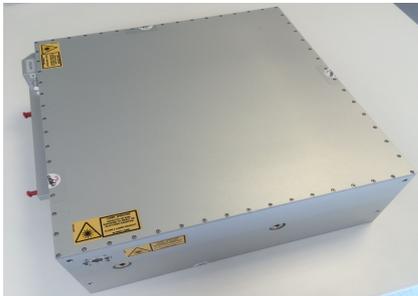

FEATURES

- _ 532 nm
- _ > 50 W
- _ down to 400 ps
- _ up to 200 kHz
- _ Liquid Cooled
- _ All solid state design
- _ Rugged single unit

Technical Specifications	Typical	
Output Wavelength	532	nm
Q-Switch Repetition Rate	40 - 200	kHz
Pulse Energy	> 1	mJ
Average Power	> 50	W
Pulse Width	400 - 1500	ps
Polarization	Linear 100:1	
Beam quality (M^2)	< 2.5	
Power supply input	24 - 28 V DC	
Pulse frequency control input	0 – 5 V (TTL)	
Cooling	Liquid	
Laser unit size	55 x 40 x 20	cm ³
Operating temperature	10 to 35	°C

Options Available:

- Beam Expanding and Collimating optics
- Red aiming beam
- Circular Polarization
- Extended operating temperature range
- Customized design and manufacturing for airborne applications

Applications:

- Ablation / Micromachining of thin films
- LIDAR - LIBS
- Specialty Scribing / Material processing
- Glass machining



All information included in this document are subject to change without notice.

Updated data sheets can be provided on request.

For further details, please contact your local **Bright Solutions** sales representative or visit our website at www.brightsolutions.it

Bright Solutions Srl
Soluzioni Laser Innovative
 Via Artigiani, 27
 27010 Cura Carpignano -PV
 Italy
Ph. +39 0382583094
e-mail: sales@brightsolutions.it