
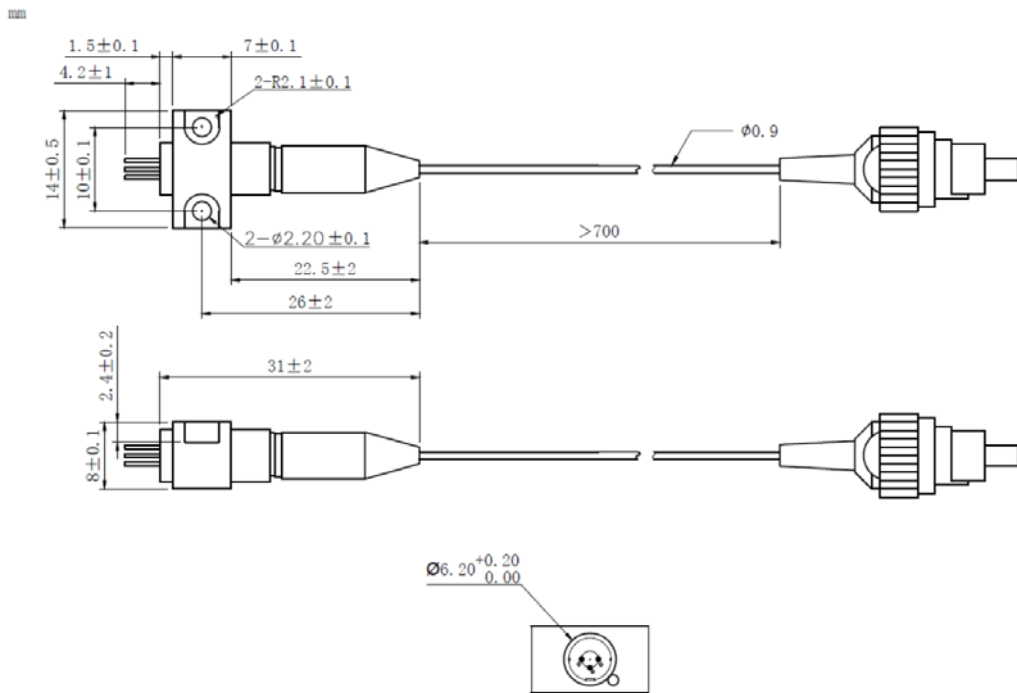


445nm~450nm 30mW Coaxial Pigtailed Laser Diode with Single Mode Fiber| Blue LD
445nm | Single Mode Blue Diode Laser Module | 450nm Fiber Coupled LD| 3um UV SM Fiber
 WSLP-445-030m-4 Wavespectrum Laser Group www.wavespectrum-laser.com

445nm Pigtailed Diode Laser 30mW/SMF en.wavespectrum-laser.com.cn			
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	-10~+70	°C
Storage Temperature	T_{stg}	-40~+85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> 🔸 445nm 🔸 3um UV SM Fiber 🔸 B82 Package 			
Applications: <ul style="list-style-type: none"> 🔸 Medical Laser Treatment 🔸 Printing 🔸 Others 			
Specifications	WSLP-445-030m-4		
	Min	Type	Max
Center Wavelength@25°C	440nm	445nm	460nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power	----	30mW	----
Fiber Type	3um SM Fiber		
Recommend Operating Temperature	25°C		
Monitor Current	----	----	----
PD Reverse Voltage	----	----	----
Fiber Connector	FC/SC/SMA905		
Fiber Length	----	80cm	100cm
Threshold Current (Typ.)	----	30mA	60mA
Operating Current (Typ.)	----	120mA	140mA
Operating Voltage	----	6.0V	7.0V
Package Style	B82		



B82 Package View:

PIN Bottom View:


1	LD(+)
2	GND
3	LD(-)

Electrically shorten LD module and store in non-extreme conditions.
 Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

