
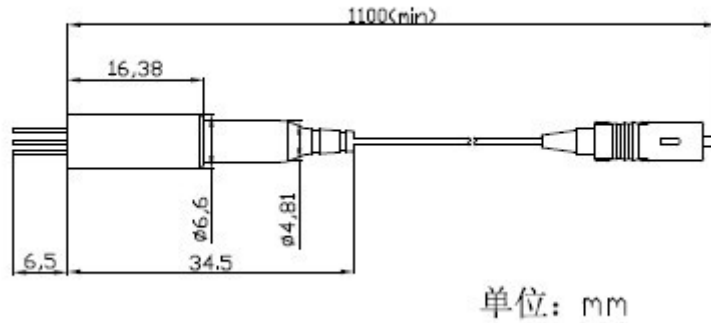


785nm 100mW Coaxial Package Pigtailed Laser Diode Module with MMF
WSLP-785-100m-105M Wavespectrum laser inc. www.wavespectrum-laser.com


785nm Pigtailed Diode Laser		100mW/MM Fiber		Wavespectrum Laser, Inc	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-10 ~ +40		°C	
Storage Temperature	T_{stg}	-40 ~ +85		°C	
Lead soldering temperature (10 sec.)	T_{is}	260		°C	
Features: <ul style="list-style-type: none"> ● 785nm ● MM Fiber ● Coaxial package 					
Applications: <ul style="list-style-type: none"> ● Medical laser treatment ● Printing 					
Specifications		WSLP-785-100m-105M			
	Min	Type	Max		
Center Wavelength@25°C	775nm	785nm	795nm		
Spectral Width (FWHM)	----	----	----		
Output Power	----	100mw	120mW		
Fiber Core	105um				
Slope Efficiency	----	1.1mW/mA	----		
Monitor Current	----	----	----		
PD Reverse Voltage	----	----	----		
Fiber Connector	FC/ST/SMA905				
Fiber Length	----	80cm	100cm		
Threshold Current (Typ.)	----	37mA	----		
Operating Current (Typ.)	----	180mA	----		
Operating Voltage	----	2.3V	----		
Package Style	Coaxial				



Coaxial Package View



Pin Bottom View

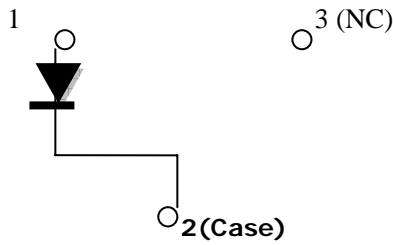

1:LD(+)

2:LD(-) & Case

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Please contact us:

Website: www.wavespectrum-laser.com (for more detailed information)

Email: info@wavespectrum-laser.com (for inquiry about this product)

