


www.bwt-bj.com

976nm 30W Fiber Coupled Diode Laser

K976DA3RN-30.00W (Standard Product)

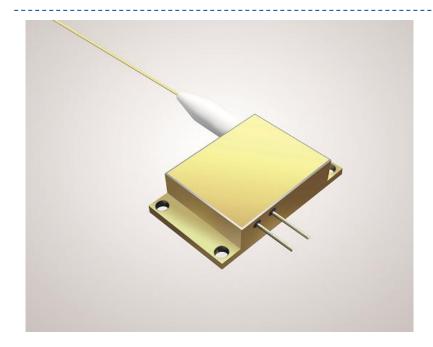

Features:

- 976nm wavelength
- 30W output power
- 105µm fiber core diameter
- 0.22NA
- 1040nm-1200nm feedback protection

Applications:

- Laser pumping
- Medical use
- Material processing

BWT Beijing's high power diode laser modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

Tel: +86-10-8368 1053 Fax: +86-10-8368 2949 E-mail: sales@bwt-bj.com URL: www.bwt-bj.com



www.bwt-bj.com

976nm 30W Fiber Coupled Diode Laser

K976DA3RN-30.00W (Standard Product)

Specifications(25℃)		Symbol	Unit	K976DA3RN-30.00W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW-Output Power	Po	W	30	-	-
	Center Wavelength	λς	nm	976±3nm		
	Spectral Width (FWHM)	Δλ	nm	6		
	Wavelength Shift with Temperature	Δλ/ΔΤ	nm/℃	-	0.3	-
	Wavelength Shift with Current	$\triangle \lambda / \triangle A$	nm/A	-	1	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	48	-
	Operating Current	lop	А	-	12	13
	Threshold Current	I _{th}	Α	-	0.9	-
	Operating Voltage	V _{op}	V	-	4.8	6
	Slope Efficiency	η	W/A	-	2.7	-
Fiber Data	Core diameter	D _{core}	μm	-	105	-
	Cladding diameter	D _{clad}	um	-	125	-
	Buffer diameter	D _{buf}	um	-	245	-
	Numerical Aperture	N.A.	-	-	0.22	-
	Total Fiber Length	L _f	m	-	1	-
	Fiber Loose Tubing Diameter/Length	-	μm	0.9mm PVC 1.5cm		
	Minimum Bending Radius	-	mm	50	-	-
	Fiber termination	-	-	-	无	-
Feedback Isolation	Wavelength Range	λ	nm	1040~1200		
	Isolation	-	dB	-	30	-
Others	ESD	V _{esd}	V	-	-	500
	Storage Temperature (2)	T _{st}	°C	-20	-	70
	Lead Soldering Temp	T _{Is}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature (3)	Top	°C	15	-	35
	Relative Humidity	RH	%	15	-	75

⁽¹⁾ Data measured under operation output at 30W@25°C.

Tel: +86-10-8368 1053 Fax: +86-10-8368 2949 E-mail: sales@bwt-bj.com URL: www.bwt-bj.com

 $[\]ensuremath{\text{(2)}}\ A\ non-condensing\ environment\ is\ required\ for\ operation\ and\ storage.$


⁽³⁾ Operating temperature defined by the package case. Acceptable operating range is $15^{\circ}\text{C} \sim 35^{\circ}\text{C}$, but performance may vary.



www.bwt-bj.com

976nm 30W Fiber Coupled Diode Laser

K976DA3RN-30.00W (Standard Product)

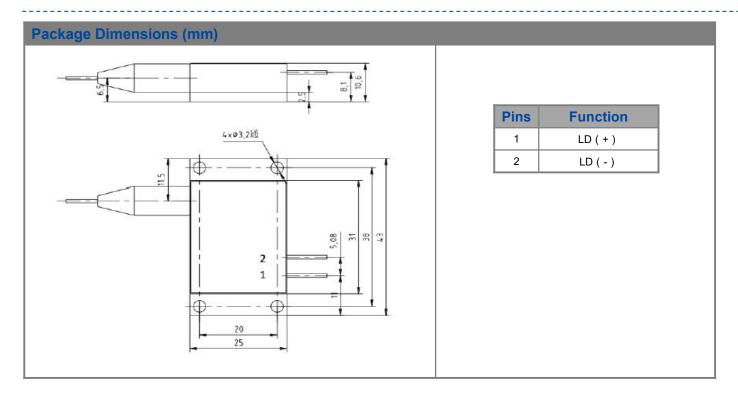

OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ♦ ESD precautions must be taken during storage, transportation and operation.
- ♦ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ♦ Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ♦ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- lacktriangle Operation temperature ranges from 15°C to 35°C .





Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.19-1

Tel: +86-10-8368 1053 Fax: +86-10-8368 2949 E-mail: sales@bwt-bj.com URL: www.bwt-bj.com