

**405nm 80mW PM Fiber Coupled Diode Laser With TEC Cooler | Violet Laser Diode Module**
**405nm 80mW Pigtailed Laser Module with Polarization Maintaining Fiber |HHL Package| High Stability**
**WSLX-405-080m-PM-H8-T**
**Wavespectrum Laser Group**
**www.wavespectrum-laser.com**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	0 ~ +70	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C

**Features:**

- 405nm
- 3um UV PM Fiber
- Built-in TEC Cooling
- 8-Pin Package

**Applications:**

- Medical Laser Treatment
- Biotechnology
- Others

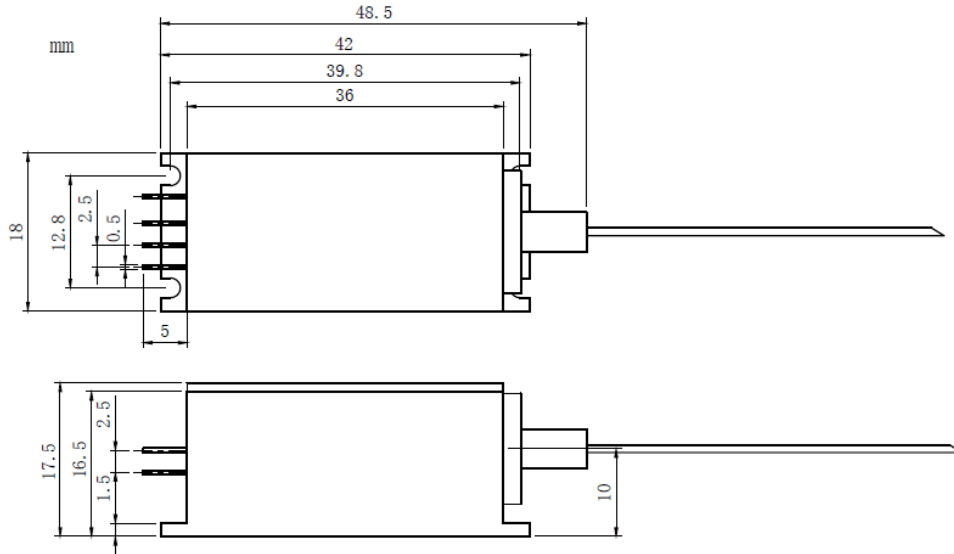


**Specifications**
**WSLX-405-080m-PM-H8-T**

	Min.	Type	Max.
Center Wavelength@25°C	±5nm	405nm	±10nm
Spectral Width (FWHM)	----	2nm	----
Output Power	----	80mW	----
Recommend Operating Temperature	25 °C		
Threshold Current (Typ.)	----	35mA	70mA
Operating Current (Typ.)	----	170mA	190mA
Operating Voltage		5.2V	6.0V
Polarization Extinction Ratio	13dB	15dB	
TEC Max Current	1.0A		
TEC Max Voltage	3.0V		
Thermistor	10K		
Fiber Type	Polarization Maintaining Fiber		
Fiber Core	3um		
Fiber Length	>80cm		
Connector Type	FC/APC		

**High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.**

sales@wavespectrum-laser.com



**8-Pin Package View:**

**Pin Out:**


PIN	FUNCTION	PIN	FUNCTION
1	RT	5	NC
2	LD (-)	6	NC
3	LD (+)	7	TEC (-)
4	RT	8	TEC (+)

**Wavespectrum offer Customized 405nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional  
(such as 2W@405nm+ 10W@980nm)

Contact us with [info@wavespectrum-laser.com](mailto:info@wavespectrum-laser.com)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

